



Conical



Height (H) mm	Part No. (Insert)	Rt Ø mm	Dimension		Nominal Voltage (AC / DC)
			Rb Ø mm	TL mm	
25	C 625 (M6)	19	25	7	400 / 500
30	C 630 (M6)	25	30	7	600 / 750
30	C 830 (M8)	25	30	9	600 / 750
35	C 835 (M8)	28	35	12	600 / 750
40	C 640 (M6)	33	40	12	600 / 750
40	C 840 (M8)	33	40	12	1000 / 1200
40	C 1040 (M10)	33	40	12	1000 / 1200
50	C 1050 (M10)	40	50	17	1200 / 1500
50	C 1250 (M12)	40	50	17	1200 / 1500
60	C 1060 (M10)	40	50	17	1500 / 1800
60	C 1260 (M12)	40	50	17	1500 / 1800
70	C 1070 (M10)	41	50	22	2000 / 2400
70	C 1270 (M12)	41	50	22	2000 / 2400

Hexagonal

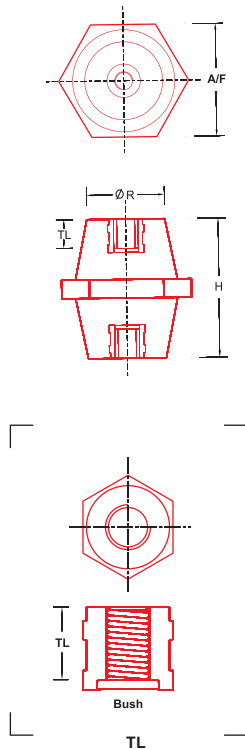

Height (H) mm	Part No. (Insert)	Rt Ø mm	Dimension		Nominal Voltage (AC / DC)
			Rb Ø mm	TL mm	
16	H 416 (M4)	16	11	3	300 / 400
20	H 420 (M4)	18	14	5	300 / 400
20	H 620 (M6)	18	14	5	300 / 400
25	H 625 (M6)	21	16	7	400 / 500
25	MH 625 (M6)	19	17	7	400 / 500
30	H 630 (M6)	33	25	7	600 / 750
30	H 830 (M8)	33	26	9	600 / 750
35	H 635 (M6)	33	26	9	600 / 750
35	H 835 (M8)	33	26	9	600 / 750
35	H 1035 (M10)	33	26	9	600 / 750
35	MH 1035 (M10)	41	33	9	600 / 750
40	H 840 (M8)	38	30	12	1000 / 1200
40	H 1040 (M10)	38	30	12	1000 / 1200
45	H 845 (M8)	40	32	12	1000 / 1200
45	H 1045 (M10)	40	32	12	1000 / 1200
50	H 1050 (M10)	46	35.5	17	1200 / 1500
50	H 1250 (M12)	46	35.5	17	1200 / 1500
60	H 1060 (M10)	50	38	17	1500 / 1800
60	H 1260 (M12)	50	38	17	1500 / 1800
65	H 1065 (M10)	55	41	17	1500 / 1800
65	H 1265 (M12)	55	41	22	1500 / 1800
70	H 1070 (M10)	55	41	22	2000 / 2400
70	H 1270 (M12)	55	41	21	2000 / 2400
75	H 1075 (M10)	52.6	42	22	2000 / 2400
75	H 1275 (M12)	52.6	42	27	2000 / 2400
76	H 1076E (M10)	48	33	22	2000 / 2400

- Material : DMC (Dough Moulding Compound) UL 94 V-0 (Halogen Free)
- All Dimensions are in MM
- TL : Effective Thread Length
- All Insulators are certified

- Insert : Brass / Steel (Zinc Passivated)
- Mounting Detail on Page No. 55
- * For maximum torque please see page no. 57